





Securifor Super 10 / B3 Fencing Systems

High Security, certified to LPS 1175 B3 (PREVIOUSLY SR2), the B Thru type of post with coverplate and SECURIFOR® Super 10 panel provides adaptable protection against intrusion.

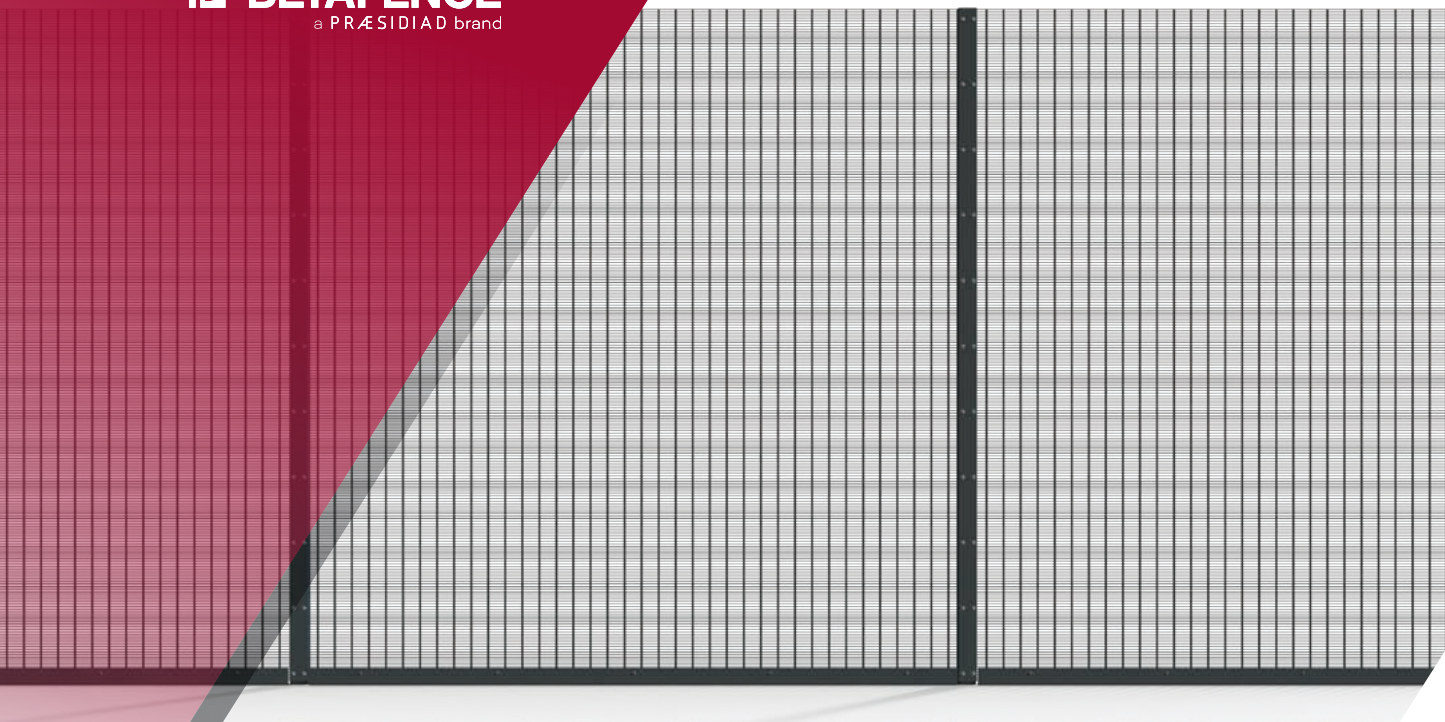

Systems detail

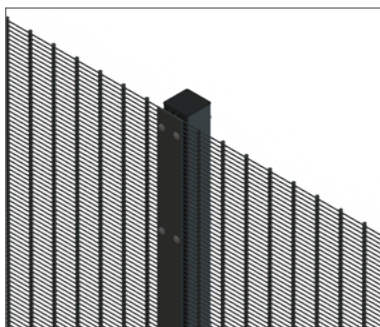

Benefits

Tested and certified to the LPS 1175 Issue 8 standard:

The LPS 1175 Issue 8 standard guarantees enhanced protection through a rigorous classification of resistance levels against intrusions. The system is tested and certified B3 (previously SR2), it offers adaptable and reliable security for sensitive sites.

Reliable Solution:

The system combines a Securifor® Super 10 panel with a square steel post with coverplate, ensuring a robust installation. Its design guarantees high stability. This versatile system easily adapts to the constraints of various sites.

Protection Against Manual Intrusion:

The combination of a narrow-mesh panel and a strong post provides effective defense against vandalism. The 4 MM horizontal wire in combination with the narrow mesh prevents climbing & scaling. The very thick 10 MM vertical wire provides rigidity and an extremely difficult to cut panel, while the post resists pulling attempts. The vertical wires are also nearly impossible to cut with standard hand tools.

Scalable Deterrent Device:

Designed for high-security sites, this panel and post system is available up to 4 meters in height. It serves as a real barrier against intrusions. For added protection, it can be paired with alarm or detection systems.

Functionalities



Security level

(when compared to other **high security fencing systems** options)



Post

Section of square post of section

(depends on the height of the fence):

- 80 x 80 x 2 mm
- 80 x 80 x 3 mm
- 80 x 80 x 4 mm

Cover plate:

80 x 5 mm (fixed through the post using mushroom head square neck bolts M8 X 110, washers M8 and self breaking nuts M8).

Square post, galvanised steel profile, with fixing by means of a cover plate to accommodate the Securifor® Super 10 panels.


Mounting systems available

- Posts embedded in concrete, with two options:

- Panels buried into the ground
- Panels surface-mounted and combine with a continuous L profile

- Posts with welded base plate:

- Mounted on a continuous L profile, with surface-mounted panels.

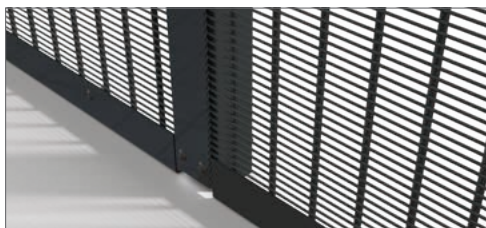

Panel

Mesh size: 76.2 x 12.7 mm

Horizontal wire diameter: 4 mm

Vertical wire diameter: 10 mm

The Securifor® Super 10 panel has a width of 2286, 2515 or 2972 mm. Several panels can be installed one above the other.

Weld strength: 50% of the minimum tensile strength of wire.

Fully tested to comply with the security standard in Europe.

Non standard panel widths or heights are available on request.

Options

- Single or double extension arms to support additional rows of barbed wire and concertina, which provide additional security.
- Other non-standard post lengths and/or sections are available on request.
- Panels bent under angle.
- U profile or Z dental strip.

Colours

Green RAL 6005, White RAL 9010, Anthracite RAL 7016 and Black RAL 9005. Other colours are available on request.

Coating technique



Our coating technology guarantees a long product lifetime even in corrosive environments.

Reliable Safety Standard

The LPS 1175 Issue 8 standard offers enhanced security thanks to a rigorous classification of resistance levels against intrusions.

The system we offer has been tested and certified to meet the standard's requirements, allowing for optimal adaptability with different categories of threats, guaranteeing tailor-made protection according to the specific needs of sensitive sites. Recognized internationally, it constitutes a guarantee of trust for professionals seeking proven and certified solutions to effectively secure their critical infrastructure.

LPS 1175 B3 (PREVIOUSLY SR2) Rated Fencing Systems

Fence width (mm)	Nominal fence height (mm)	Length of post in concrete (mm)	Length of base plate post (mm)	Post section (mm)	Number of bolts per intermediate post	Number of bolts per corner post
2286, 2515 or 2972	2000	2784	2034	80 x 80 x 2	7	7 x 2
	2400	3190	2440	80 x 80 x 2	9	9 x 2
	3000	3774	3024	80 x 80 x 2	11	11 x 2
	4000	4928	4028	80 x 80 x 3 (for fencing width 2286 and 2515) 80 x 80 x 4 (for fencing width 2972)	14	14 x 2

Saudi Arabia:
6th Floor, Sumou Tower,
Prince Turki Street, Al Yarmouk
Al Khobar-34423
Kingdom of Saudi Arabia

Middle East:
P.O. Box 293517 DAFZA,
Building E 5, Block A 8th Floor,
Office 802

Belgium:
Blokkestraat 34B
8550 Zwevegem
Belgique

USA:
3309 SW Interstate 45,
Ennis, TX 75119

Betafence is the world market leader in fencing solutions, access control and detection for perimeter protection. All Betafence companies and product names are trademarks owned by PRÆSIDIAD Group Limited. Modification in products and assortment are subject to change without prior notice.

Proud to be a PRÆSIDIAD brand. Betafence is part of a global network, working alongside Hesco as a leader in perimeter security systems and solutions. For more information please visit praesidiad.com.

BETAFENCE
Securing What Matters

betafence.com